

Sulphur Basin Feasibility Study Revised Yield Study



Presentation to SRBA

June 16, 2015



Outline



- Purpose of Project
- Model Description
 - Method to mimic priority assumption
 - Environmental flow requirements
- Updated Stand-Alone Yields
- Combination Yields
- Results
- Alternatives that reach supply goal
- Conclusions



Description of Project



- Meet regional need of 604,000 ac-ft/yr
 - Region C = 584,000 ac-ft/yr
 - Region D = 20,000 ac-ft/yr
- Find combinations of Patman reallocation and Marvin Nichols that meet need
 - Patman between 232.5 and 242.5 feet
 - Nichols between 296.5 and 313.5 feet
- Using updated RiverWare model
 - Removed precipitation on reservoir from inflows
 - Hydrology extended through 2014
 - Add eflows and priority pass-throughs

Modeling Approach



- Wright Patman water right
 - Current
 - Senior to Ralph Hall and Marvin Nichols
 - Partially senior to Lake Chapman (60,000 ac-ft/yr)
 - Uses Ultimate Curve
 - Reallocation assumed to be junior to Nichols
- Other water rights represented by historical operation

Modeling Approach



- Developed a WRAP “mini-WAM” using COE hydrology
 - Only Sulphur Basin features in COE model
 - Determined monthly priority pass-throughs at each project
 - Distributed evenly to each day of month and input into RiverWare model



- Environmental Flows

- Lyons method

- Default when no SB3 flows
- Previously developed by RPS


- Limited to inflows

- Applied at Patman when storage is above Ultimate Curve


- Existing Patman rights using current 10/96 cfs release

- Releases never less than current practice


Nichols Lyons Flows

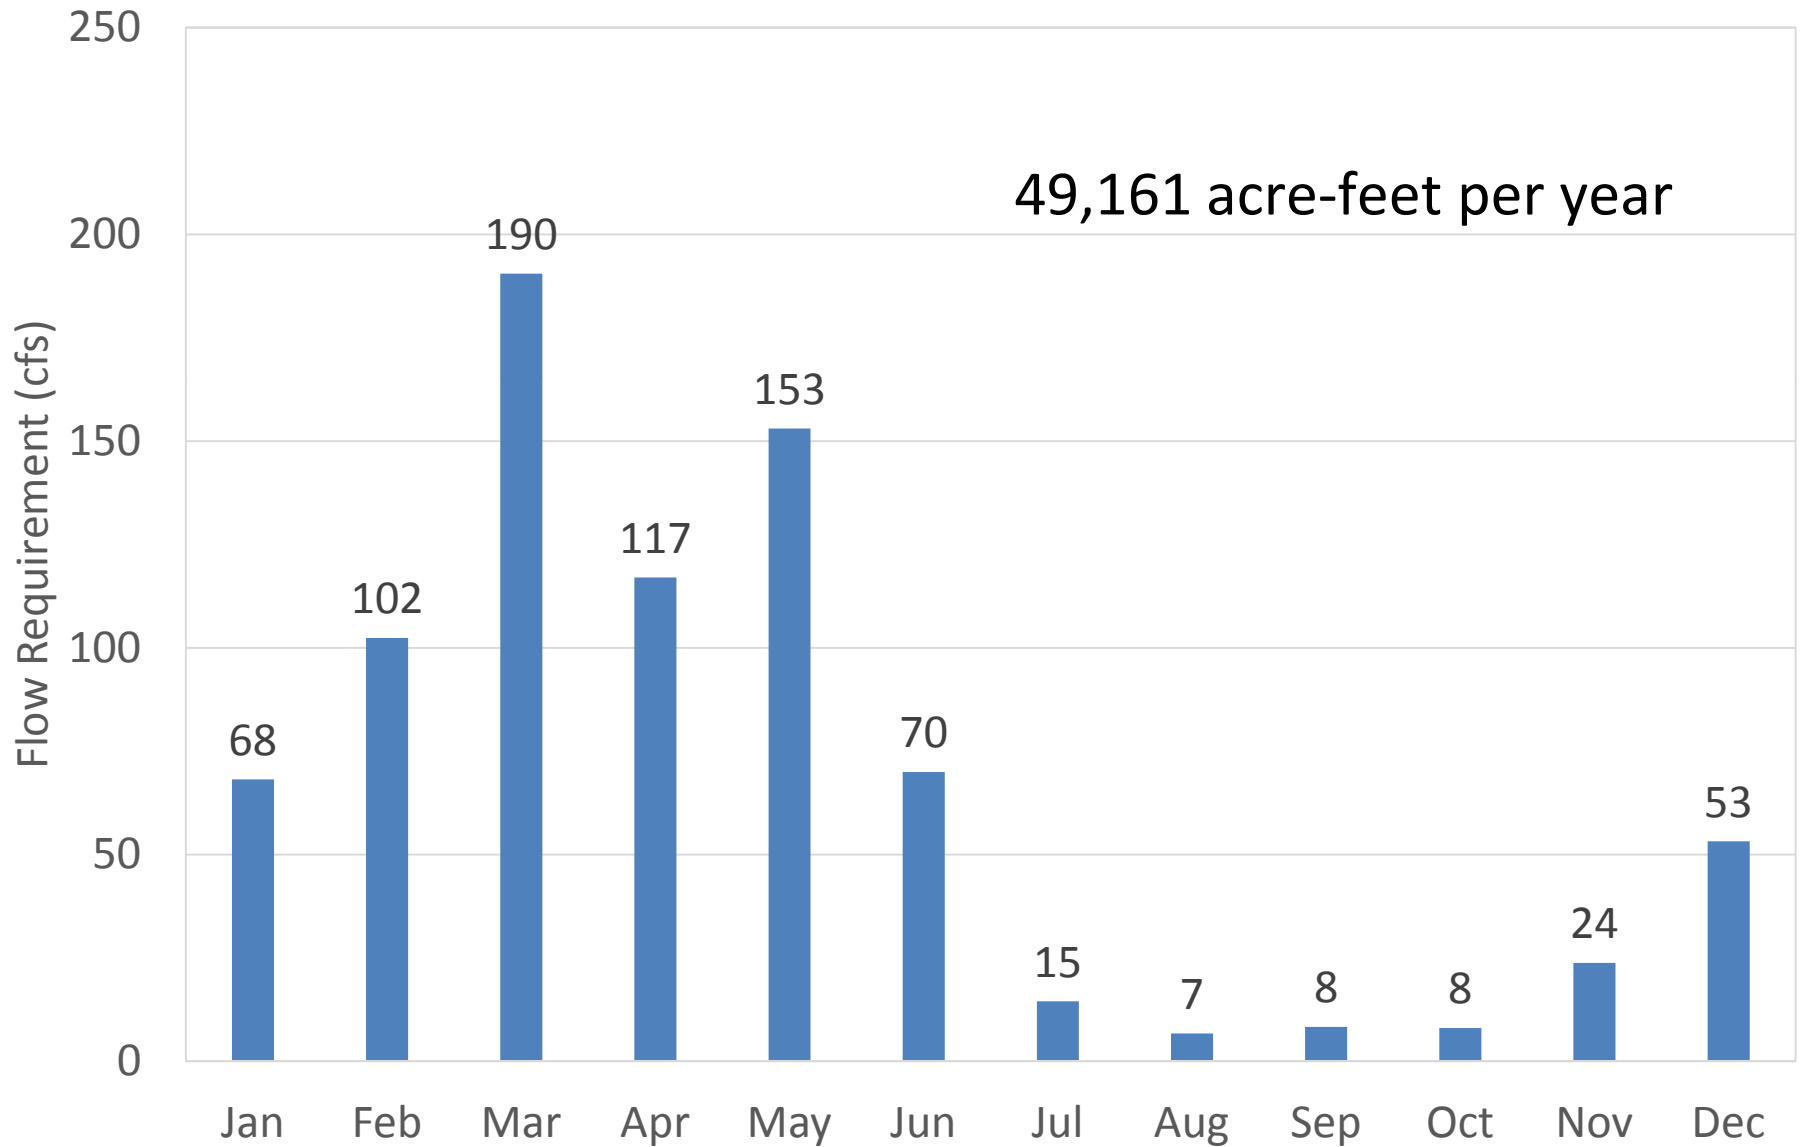


Patman Eflows

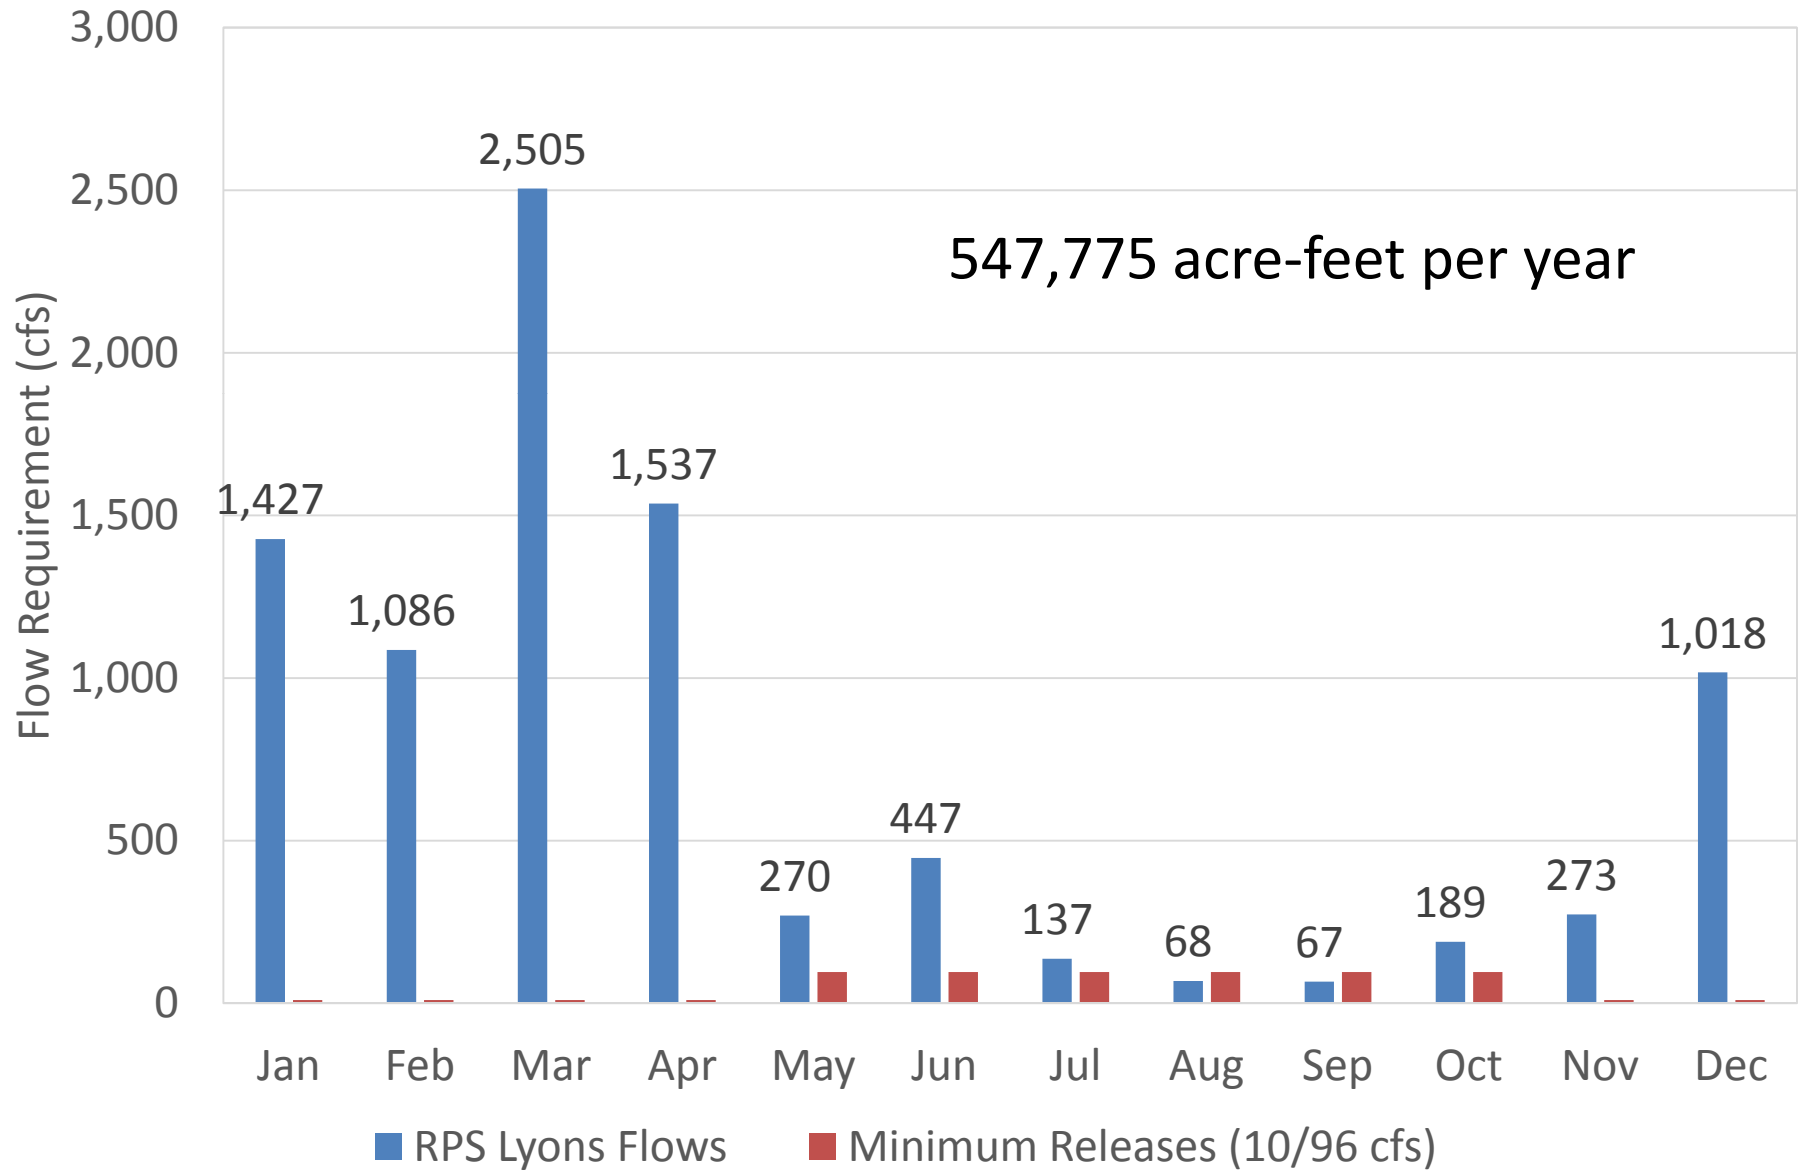

Patman Stand-Alone Yields

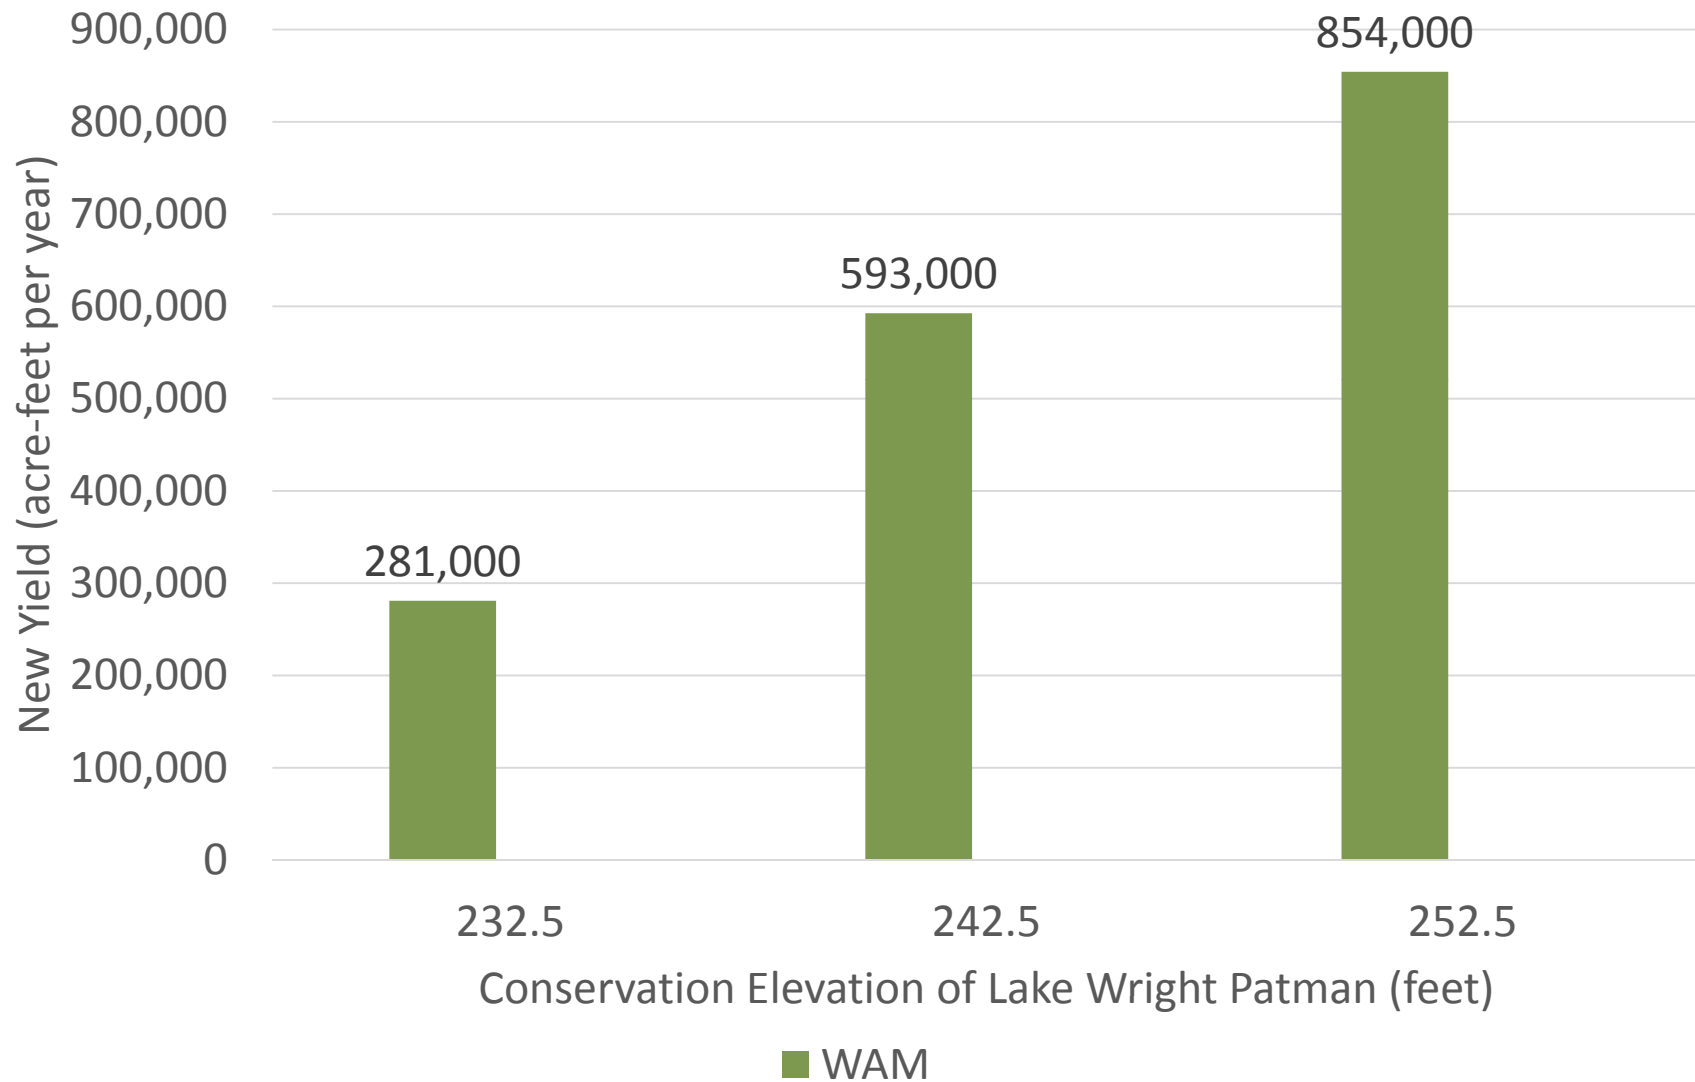

Patman Stand-Alone Yields

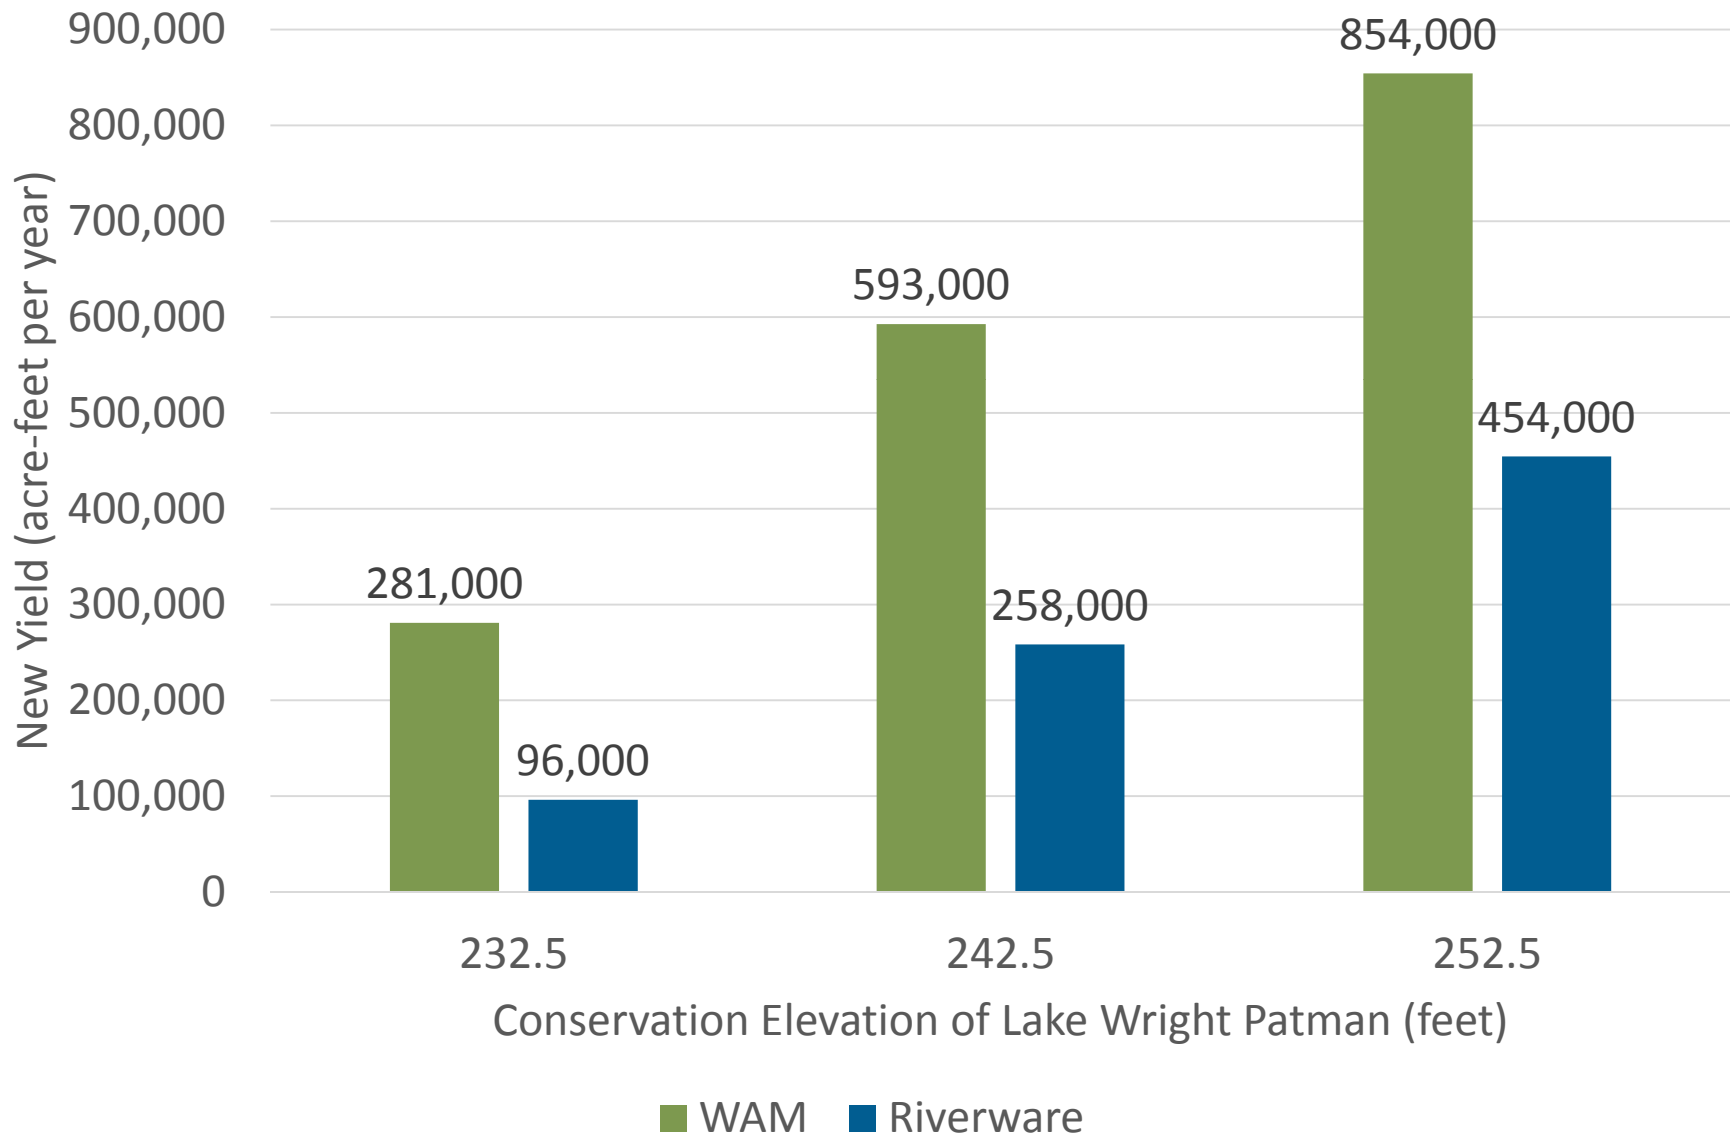


What is going on?




- Most significant
 - New drought of record
 - Environmental flows
 - Current Patman release policy
- Less significant
 - Different application of priority
 - Time step, hydrology, flood ops etc.

Annual Patman Inflows

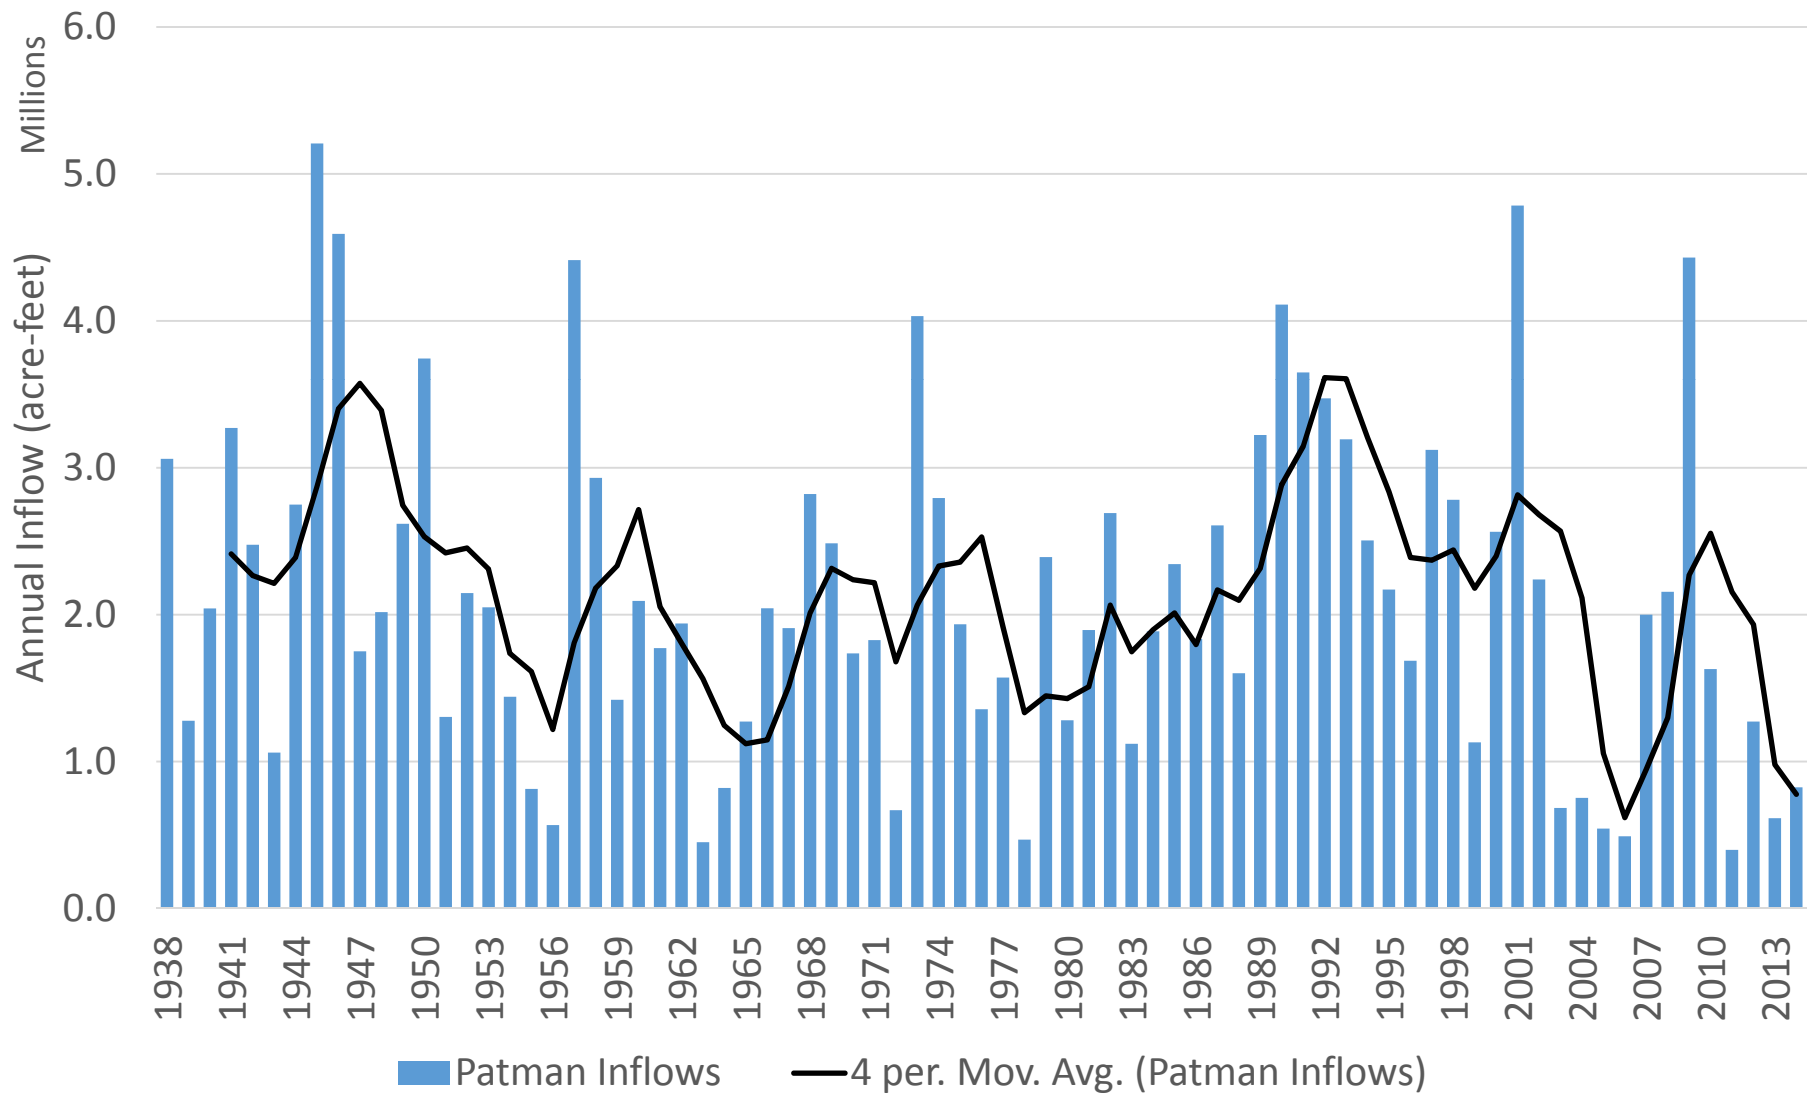

Nichols Storage Traces

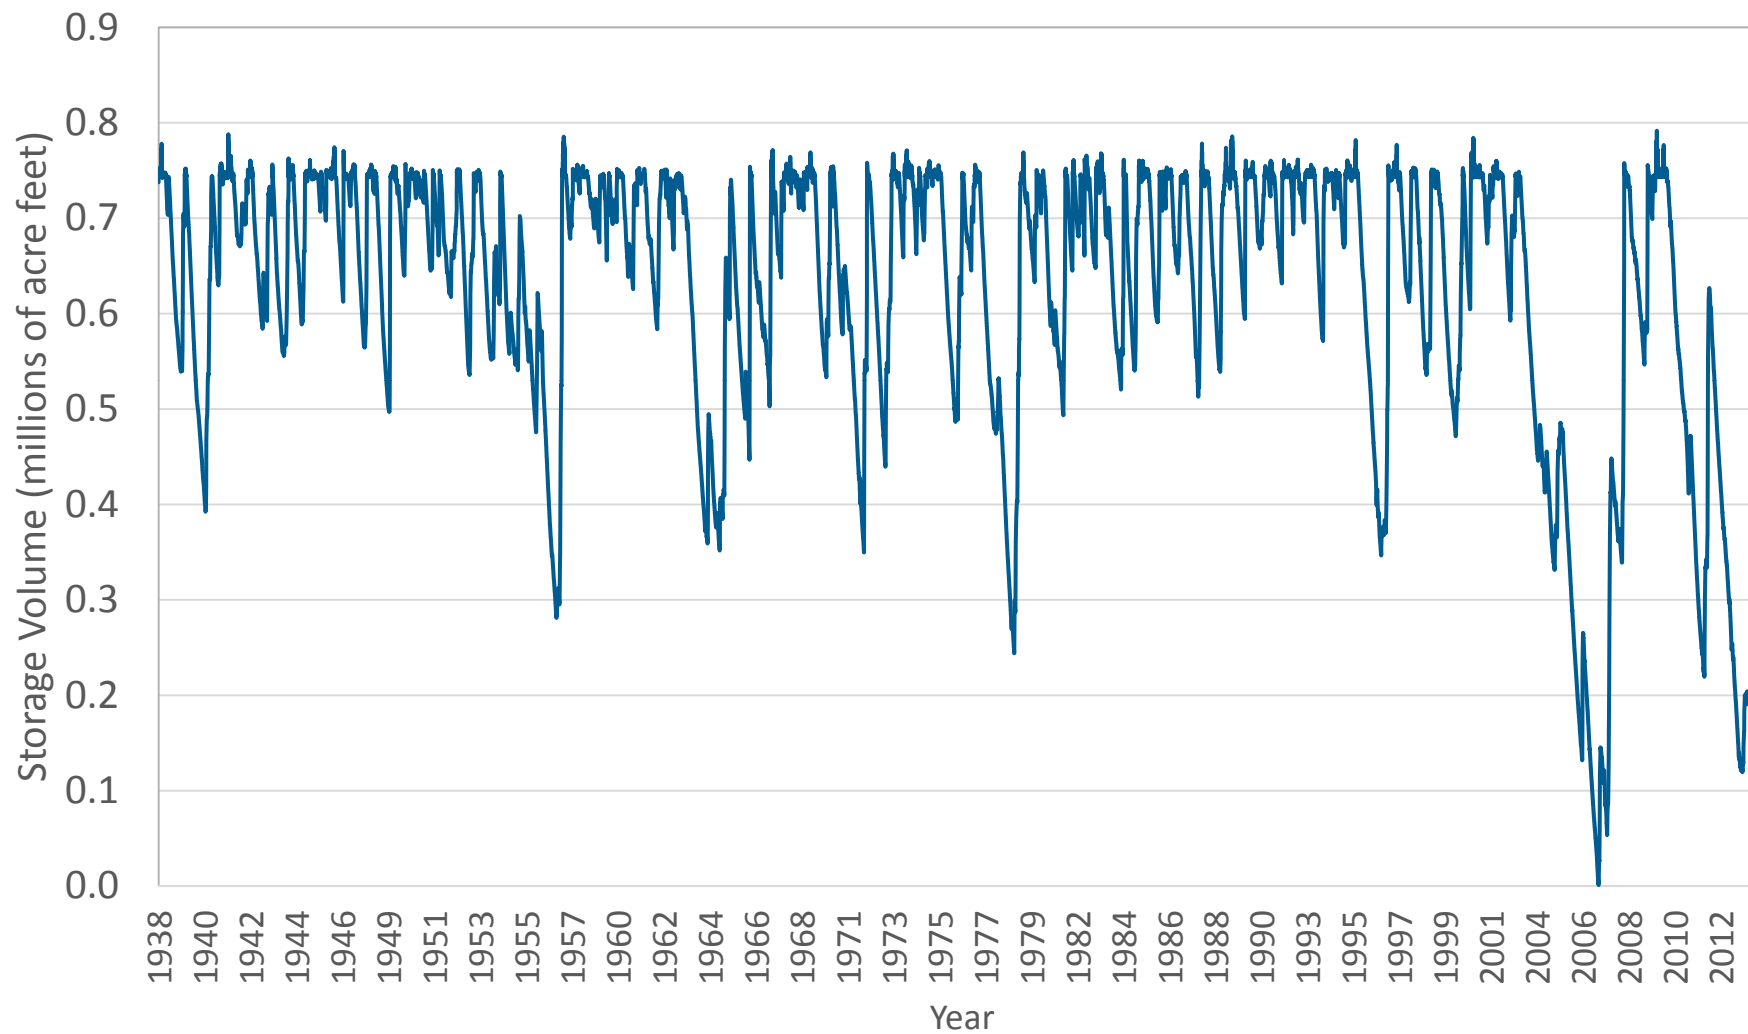

— 313.5 feet, FY=299,500 ac-ft/yr

Sensitivity analysis



- Modeling Assumptions: Four ON-OFF Switches



Priority
Releases



Lyons
Flows



Period of
Record




Patman
Releases

Nichols Stand-Alone Yields



- Impact of modeling assumptions at 313.5 feet

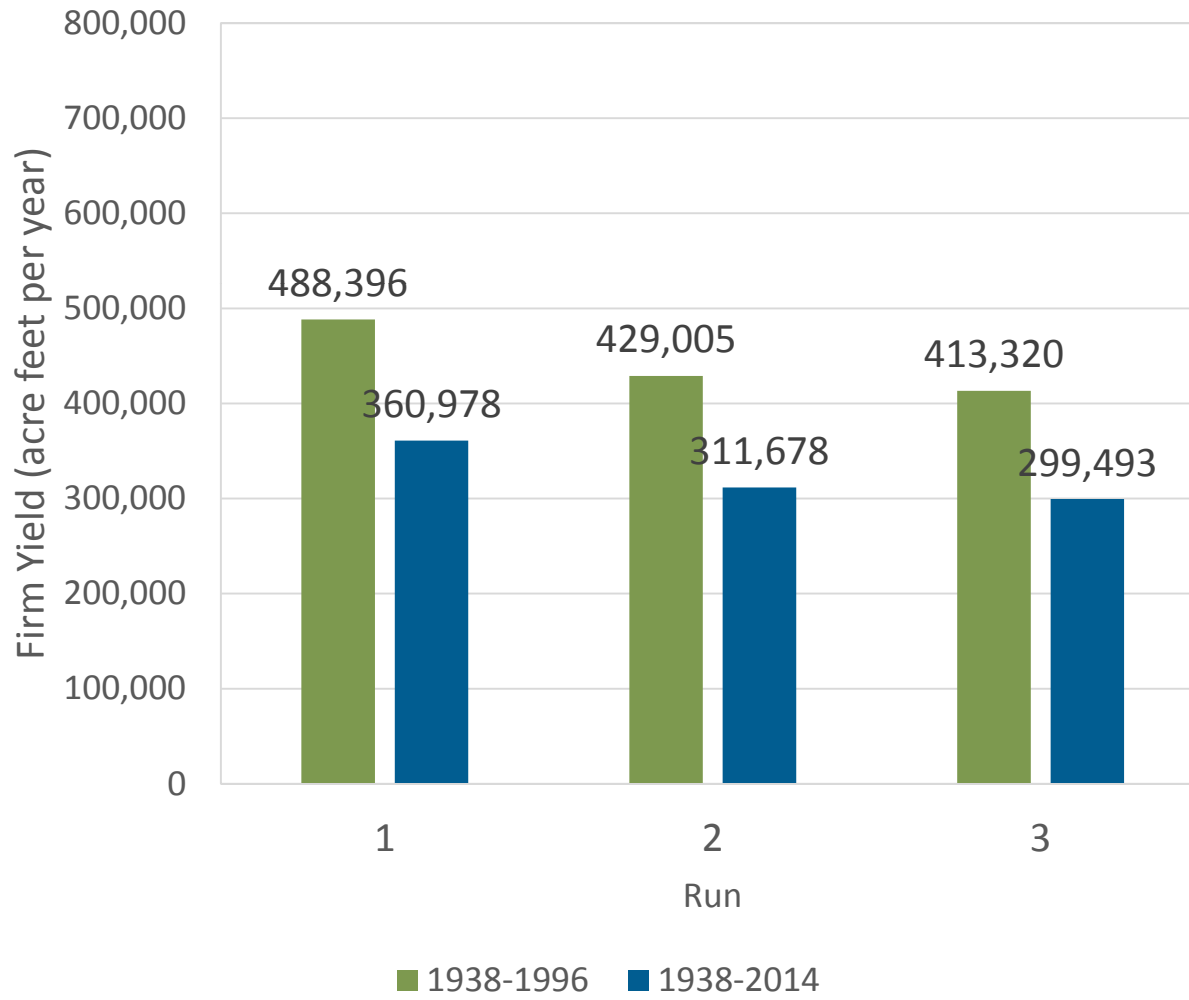


Run	Priority?	Lyons?
1	No	No
2	Yes	No
3	Yes	Yes

Patman Stand-Alone Yields



- Impact of modeling assumptions at 242.5 feet


Run	Priority?	Lyons?	Patman Releases
1	No	No	10 cfs
2	Yes	No	10 cfs
3	Yes	Yes	10 cfs
4	Yes	Yes	10/96 cfs

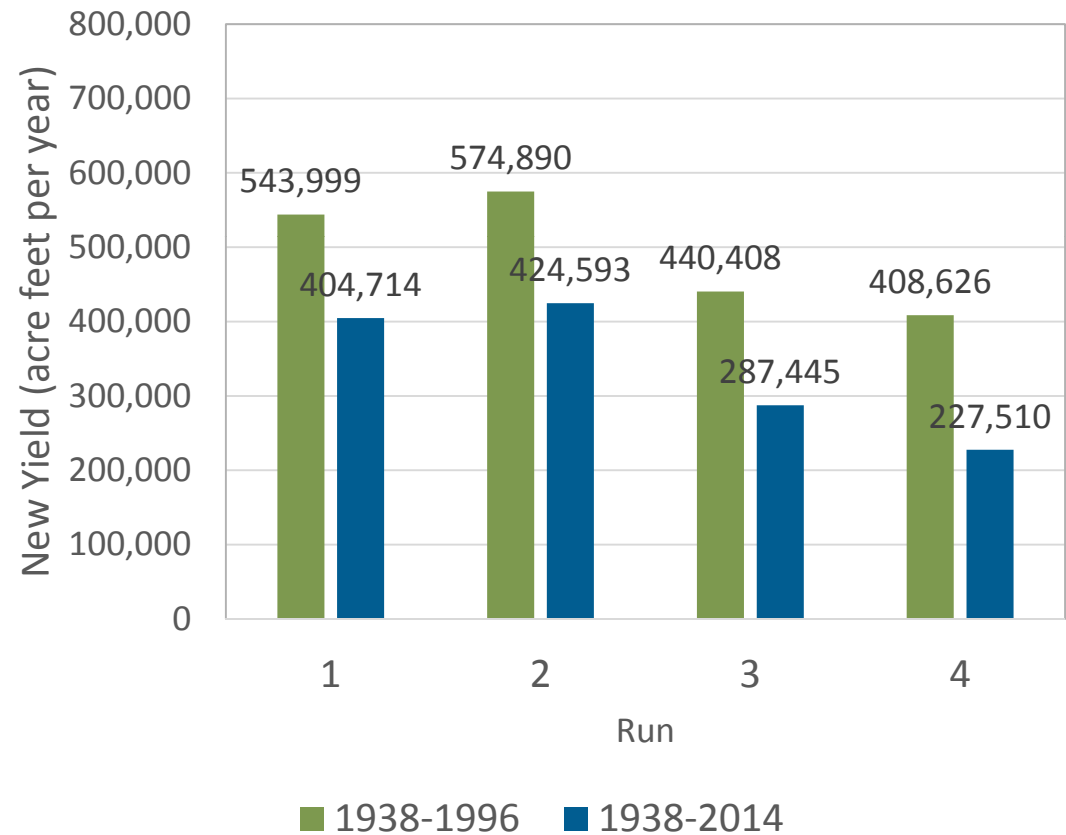

Combination Yields



- Patman at 242.5 ft, and Nichols at 313.5 ft

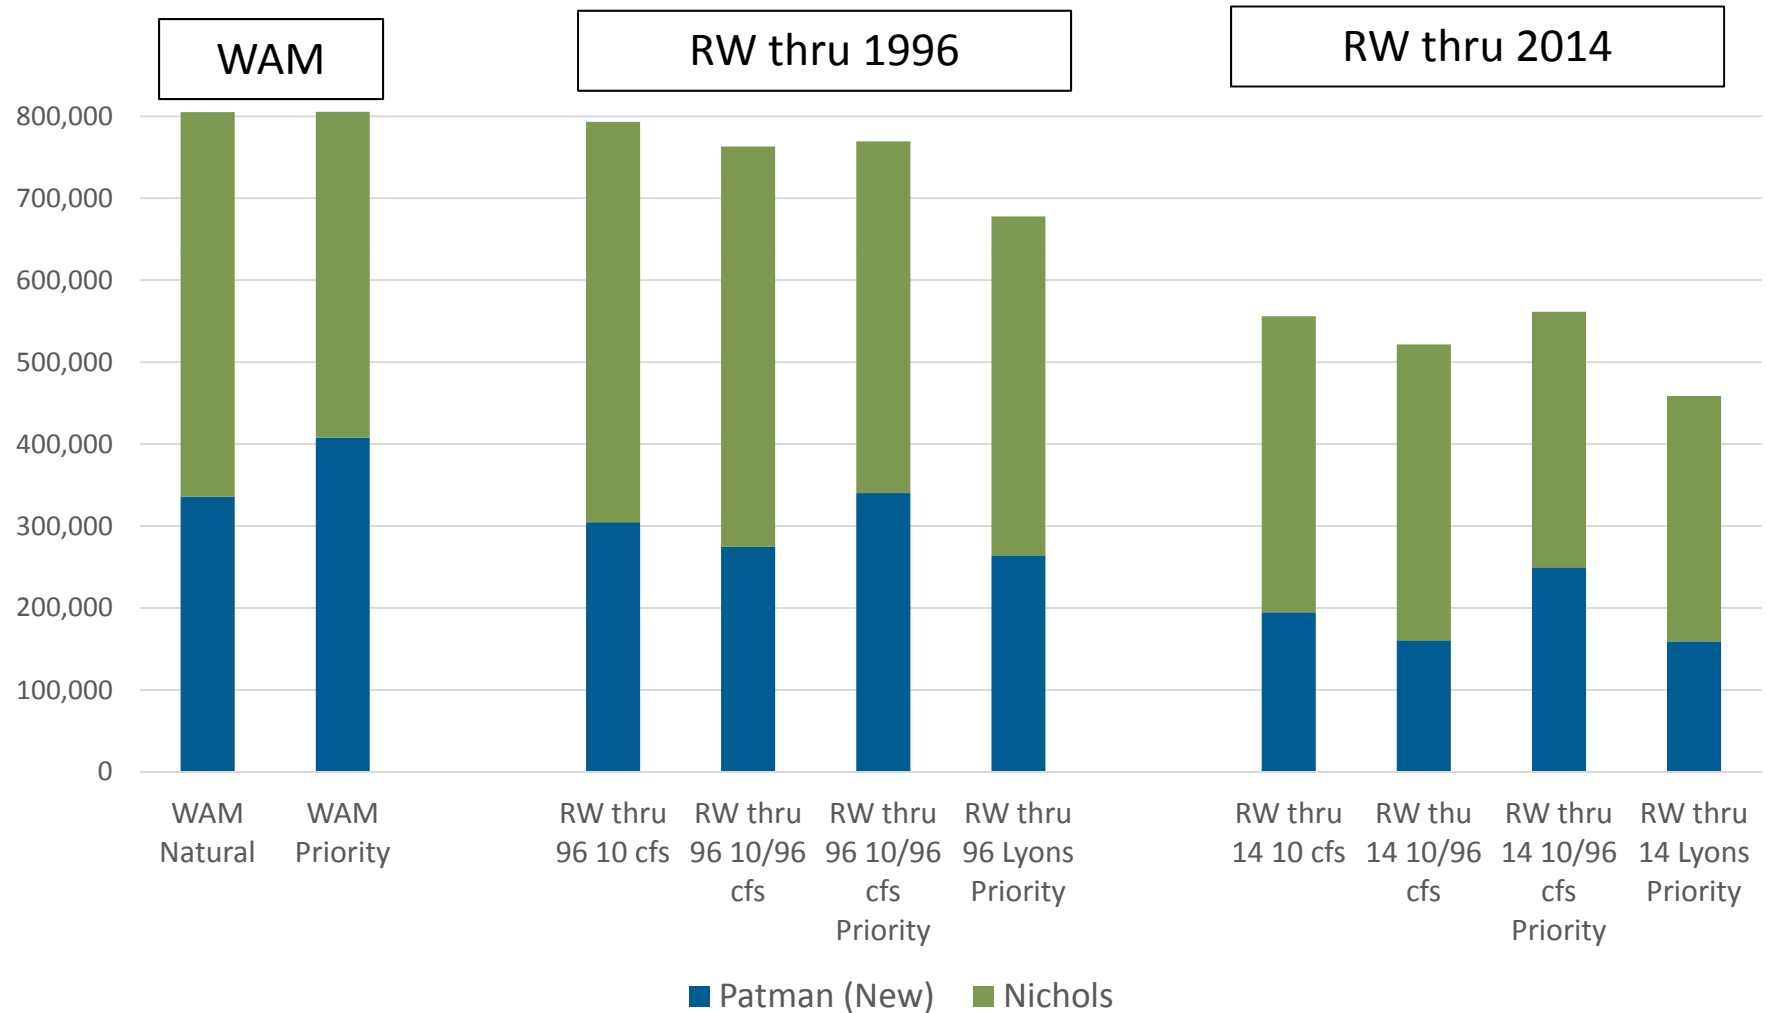

Interim Results



1. New critical period is 2002-2006/07
2. Storage still very low at end of 2014
3. Eflows have a very large impact on Patman reallocation
4. Yield goals not met because of combination of eflows and new drought
5. Source of yield impacts*
 - Loss due to drought: ~210,000 ac-ft/yr
 - Loss due to eflows: ~105,000 ac-ft/yr
 - Loss due to 96 cfs Patman release: ~30,000 ac-ft/yr
- 6. Selected elevation ranges do not meet supply goals**

* For MCN at 313.5ft and Patman at 242.5ft

Path Forward




- What does meet supply goals?
 - Larger MCN
 - Larger Patman
 - Alternative eflows at Patman
 - Changes in current Patman releases

Elevations that meet goals




Combined Yields - All Switches

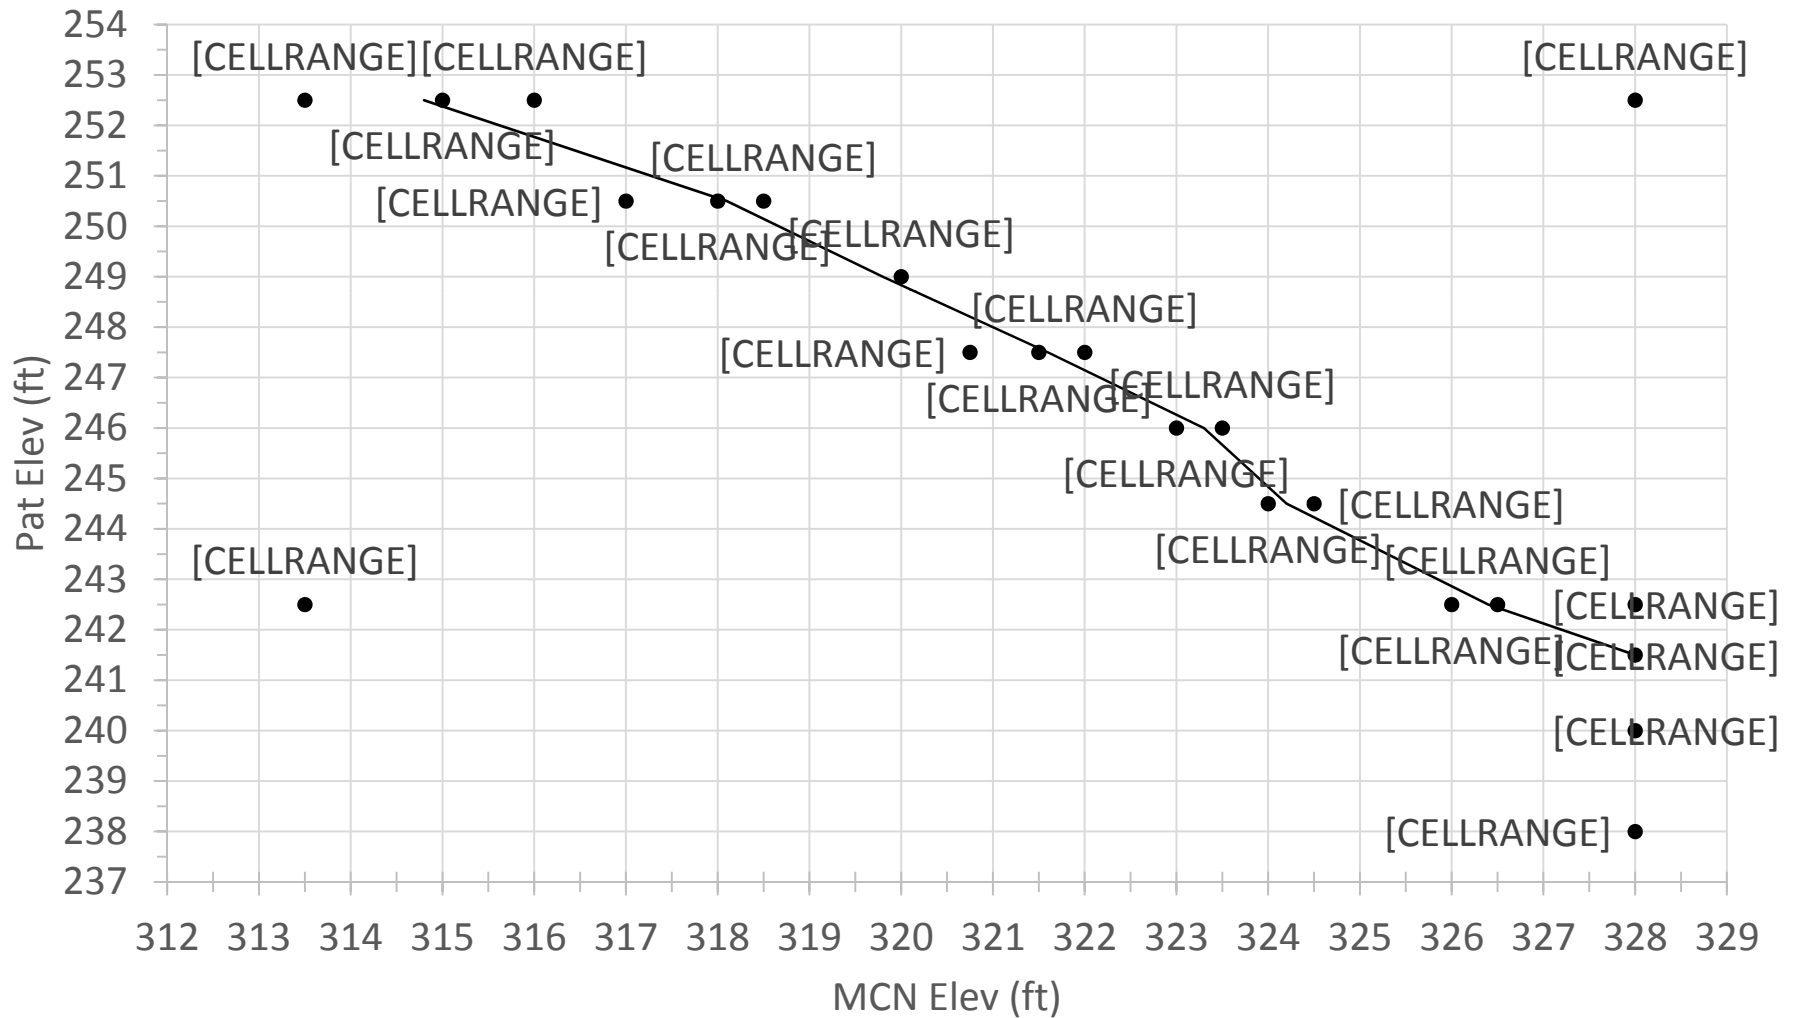

White Oak Creek Impact



Reallocation Elevation at Wright Patman (Feet)	Approximate Area (Acres) Inundated	Percentage of Area with WOCMA Inundated
232.5	1,000	4
237.5	2,750	11
242.5	5,250	21
252.5	14,500	58
259.5	18,286	70

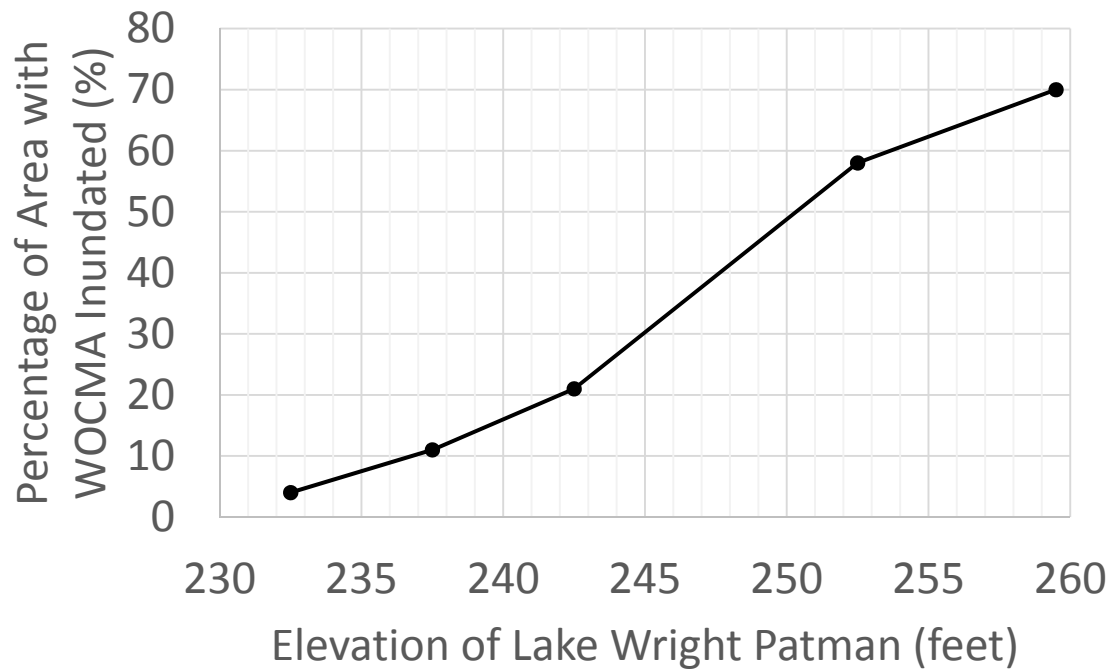

Model Alternatives



- Modeling Assumptions: Three **New** Switches

Priority
Releases



Strict Priority
vs.
Patman
Subordination

Lyons
Flows



RPS Flows
vs.
Inflow-Based

Patman
Releases




Constant 10 cfs
vs.
10/96 cfs Releases

Preliminary Results




- Patman at 232.5 ft, Nichols at 328.0 ft

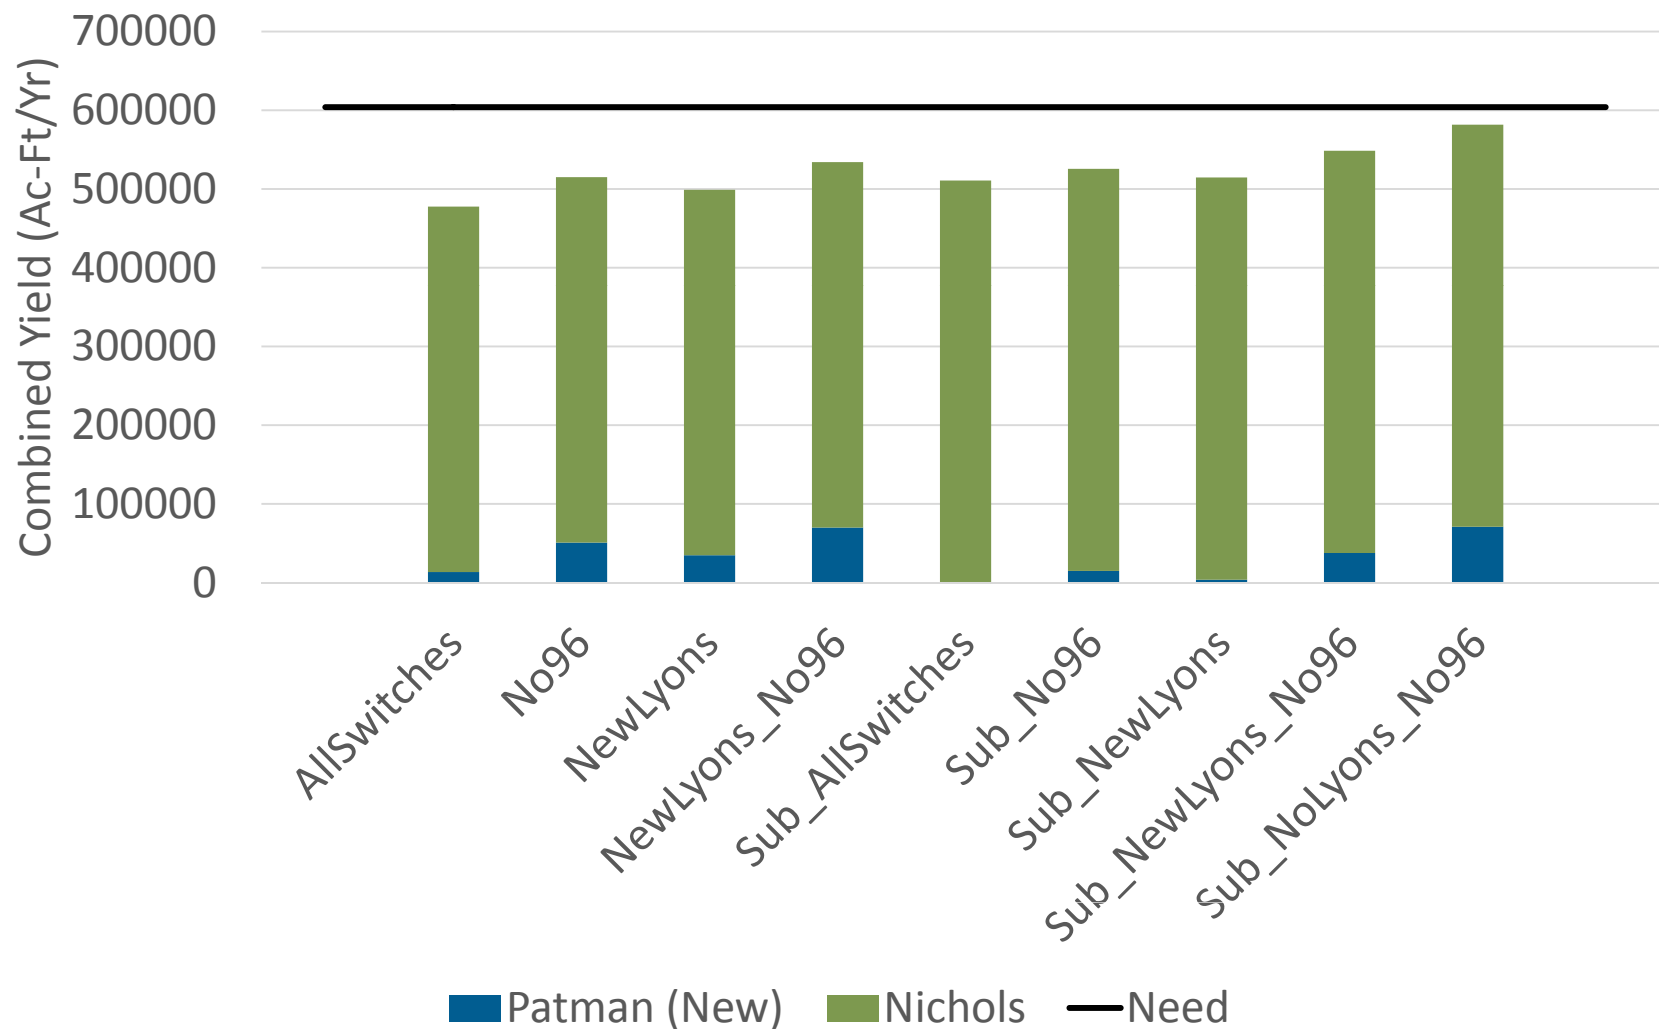

Preliminary Results




- Patman at 237.5 ft, Nichols at 328.0 ft

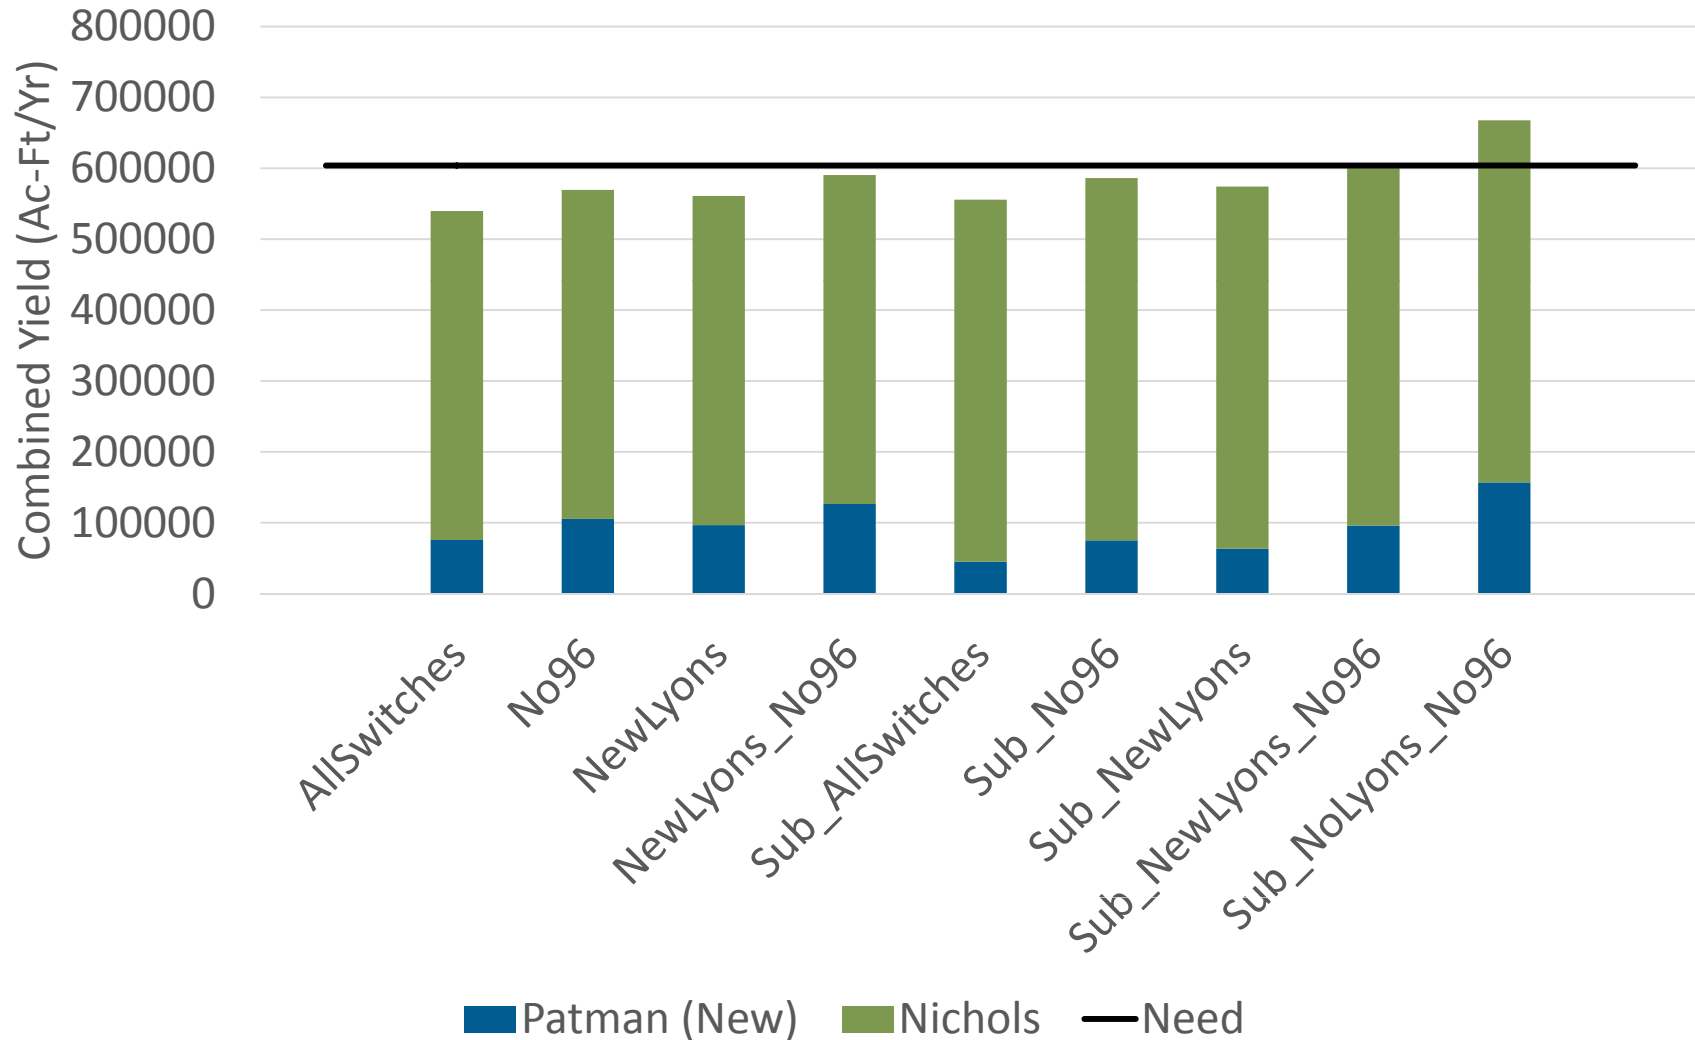

Preliminary Results



- Patman at 242.5 ft, Nichols at 328.0 ft

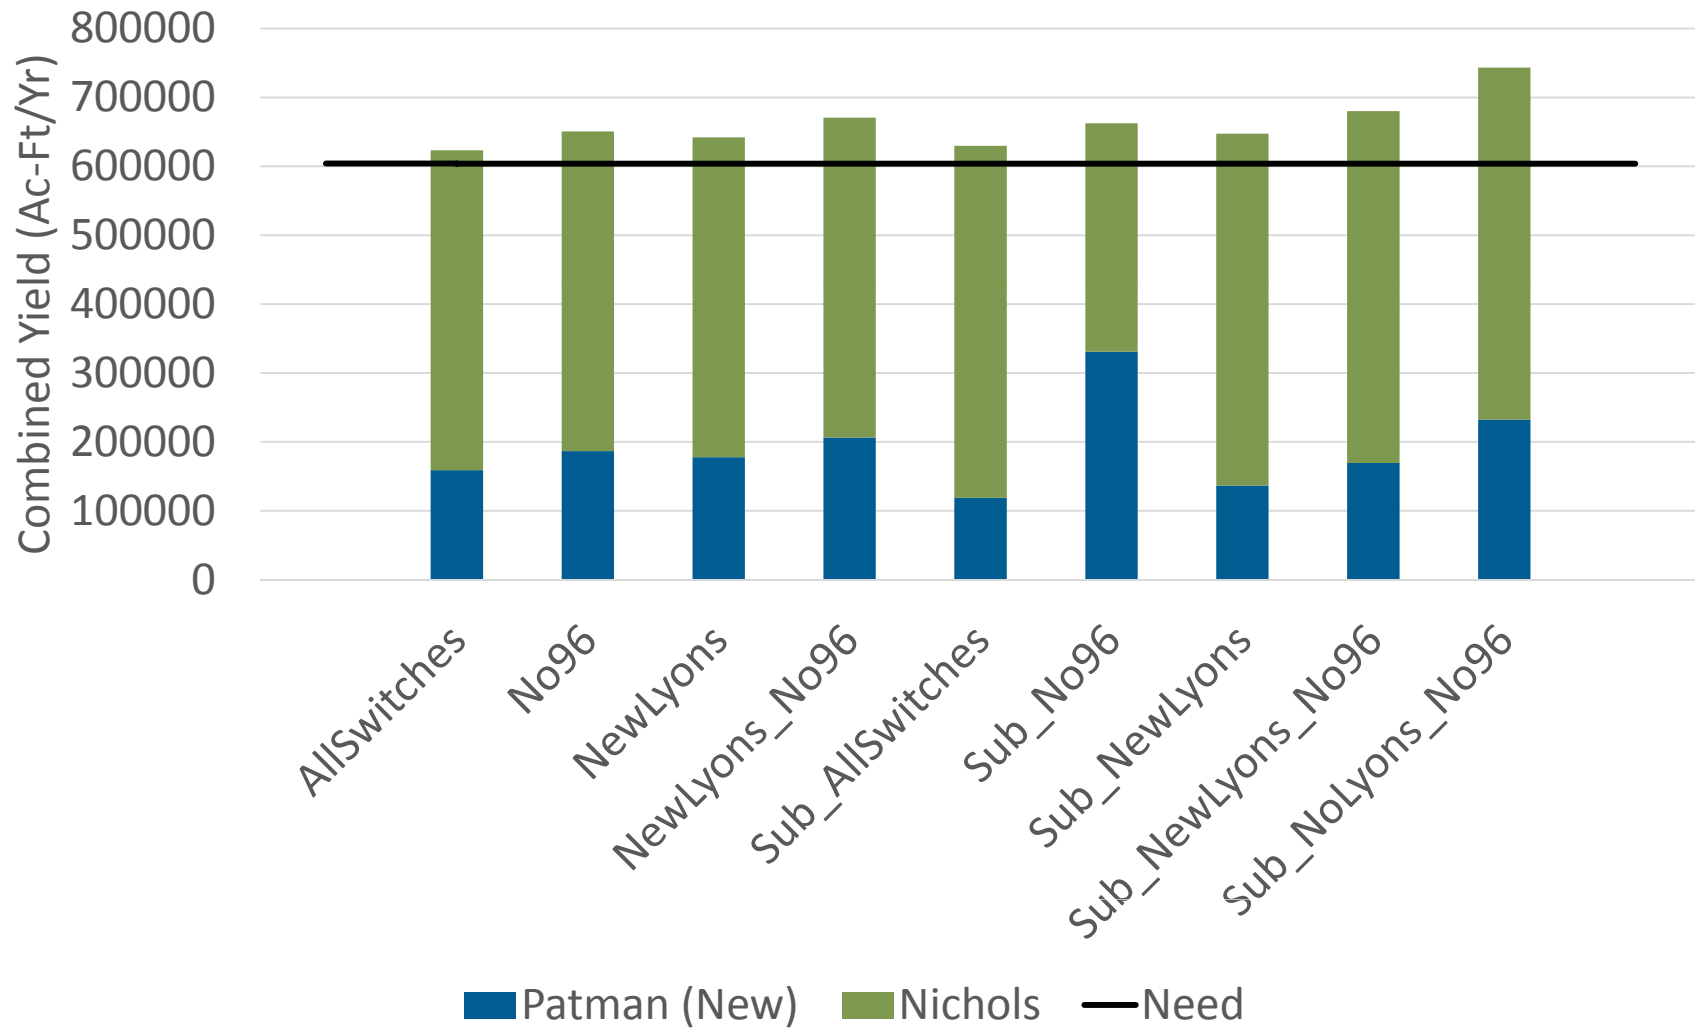

Increases In Yield



- Due to inflow-based Lyons flows: ~20,000 ac-ft/yr (4%)
- Due to constant 10 cfs release: ~30,000 ac-ft/yr (6%)
- Due to Patman subordination:
 - Bigger impact when Patman is small and Nichols is large
 - ~4,000 ac-ft/yr (<1%) for Patman >242.5ft
 - ~15,000 ac-ft/yr (3%) for Patman at 232.5ft-237.5ft
- Due to all three switches: ~70,000 ac-ft/yr (14%)

Conclusions



- Using project assumptions, smallest Patman reallocation that meets supply goals is 241.5 feet (Nichols at 328 feet)
- Can meet supply goals at 237.5 feet reallocation with significant modifications to assumptions
- White Oak Creek impacts problematic
- Further work on Patman releases may be needed

Sulphur Basin Feasibility Study Revised Yield Study



Thank you for your attention!

